

/ Descriptions

20V~200V 3.0A
:

/ Features


/ Applications

/ Equivalent Circuit



/ Pinning


1



2

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

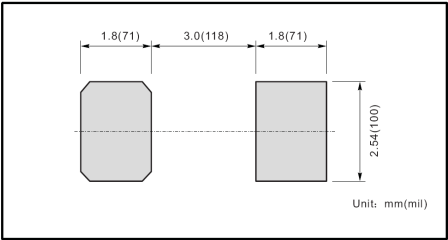

/ Marking


/ Absolute Maximum Ratings(Ta=25)

	()									
)										
)	θ									

/ Electrical Characteristics(Ta=25)


		°C													
		°C													

/ Electrical Characteristic Curve

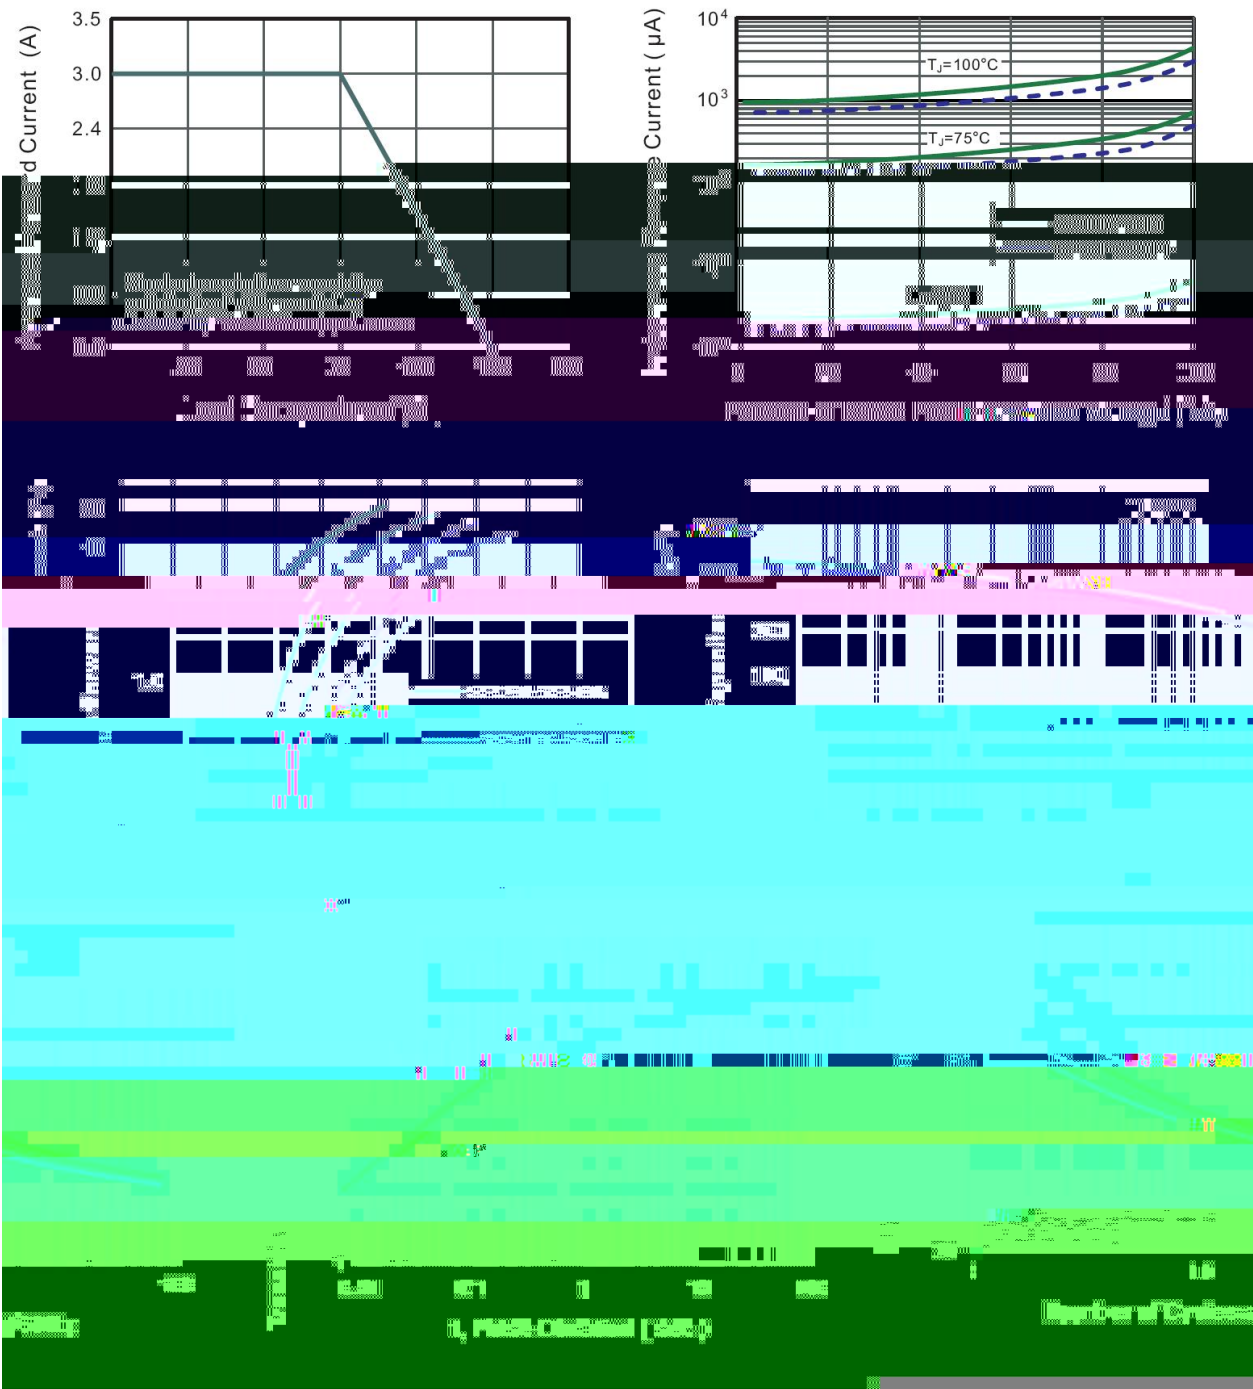

/ Package Dimensions

SMBF

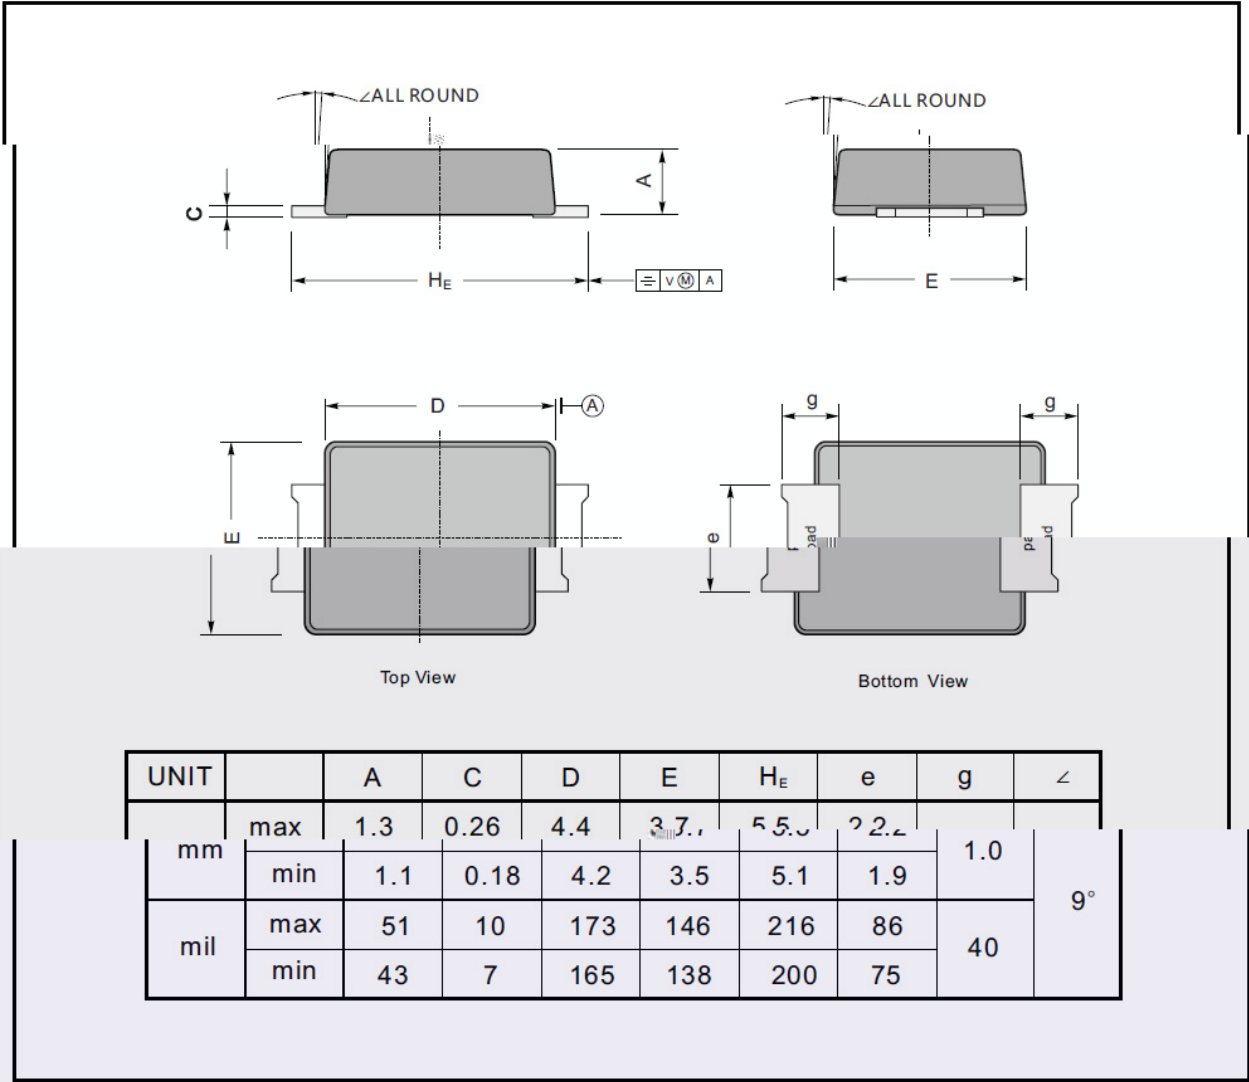


/ Marking Instructions


Marking

Type number	Marking code
SS32BF	S32B
SS34BF	S34B
SS36BF	S36B
SS38BF	S38B
SS310BF	S310B
SS312BF	S312B
SS315BF	S315B
SS320BF	S320B

/ Marking Instructions

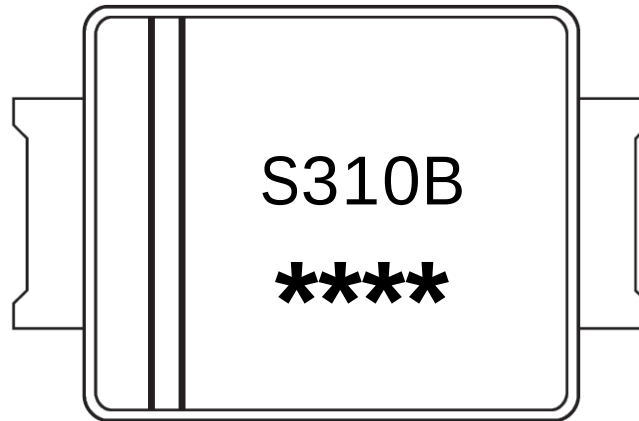

() /

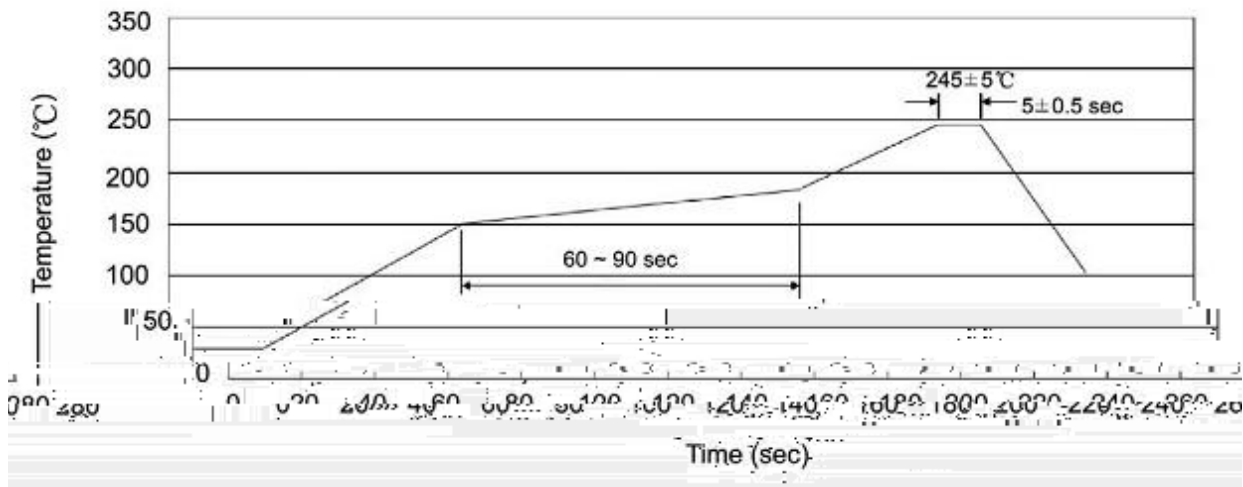

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

						"		

/ Notices