

/ Descriptions

20~200V

3.0A

:

:

/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




PIN	DESCRIPTION
1	Cathode
2	Anode

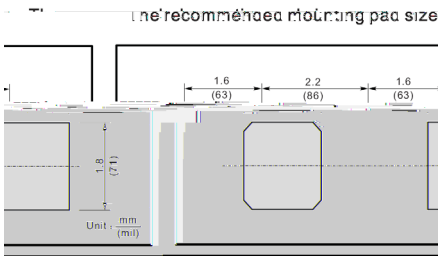


/ Marking

	()										
	θ										$^{\circ}\text{C}$

/ Electrical Characteristic Curve

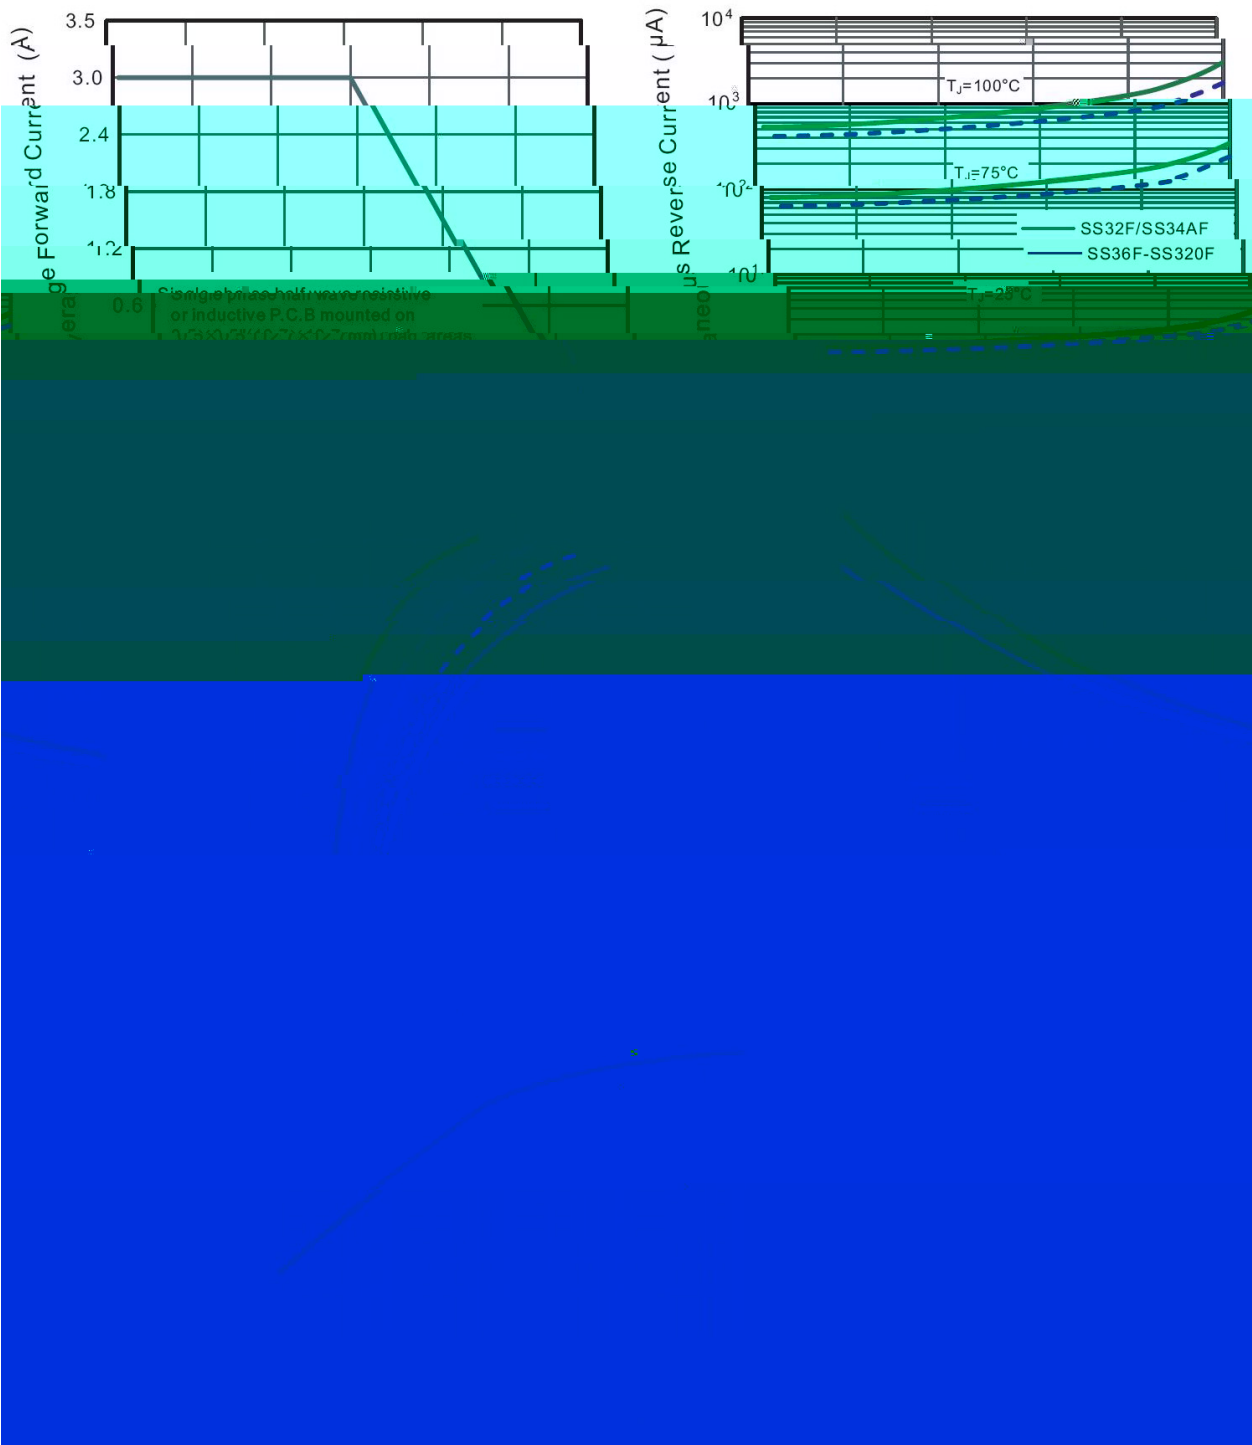

/ Package Dimensions

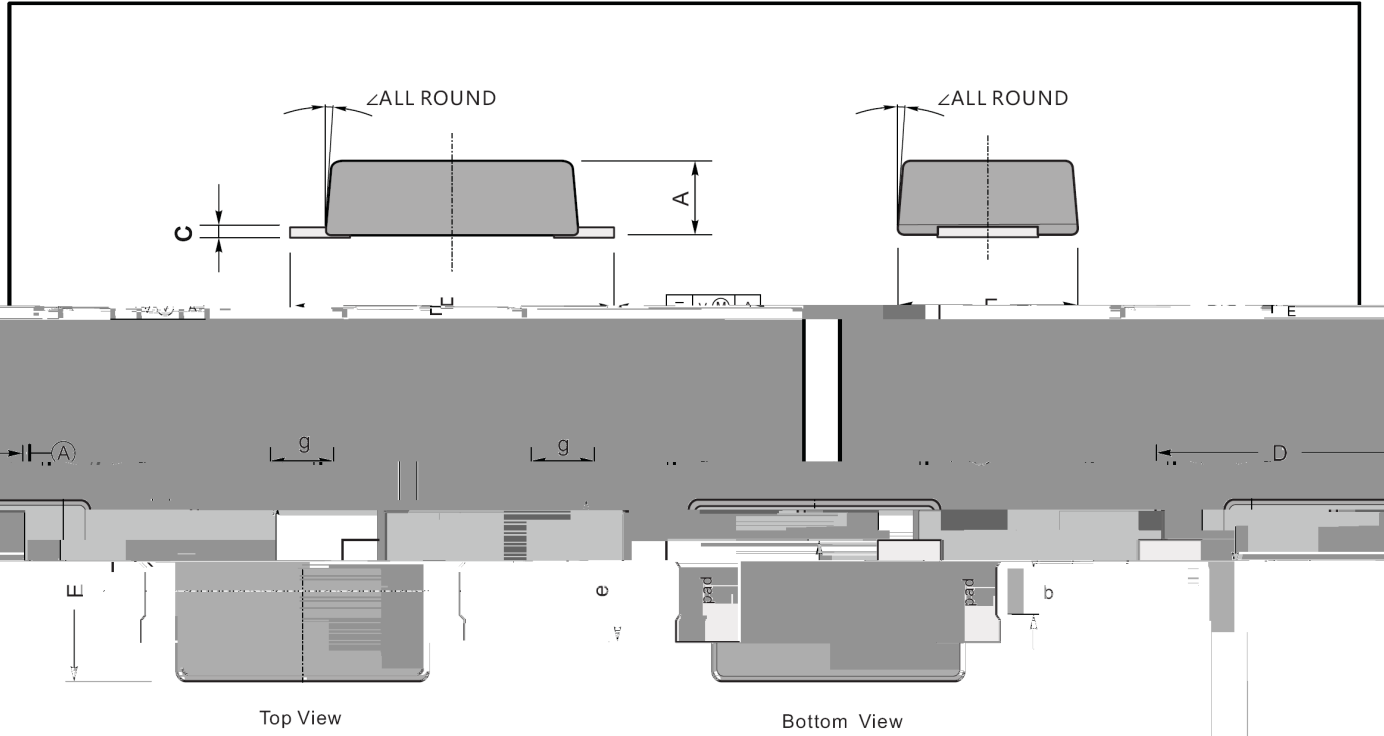


IT	A	C	D	E	e	g	H _E	b	∠	UN		
max	1.2	0.20	3.7	2.7	1.6	1.2	4.9	1.05				
7°		mm		min	0.9	0.12	3.3	2.4	1.3	0.8	4.4	0.65
			max		47	7.9	146	106	63	47	193	41
		mil		min	37	17	160	104	51	34	130	36

/ Marking Instructions




/ Marking Instructions

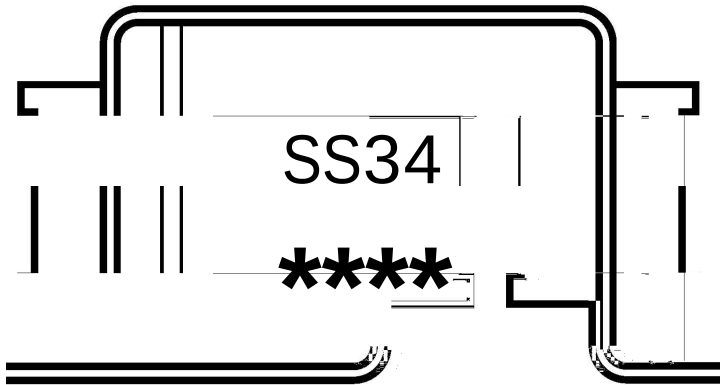

SS34			
*****	1	*	3 *
SS34			
*****	*		*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

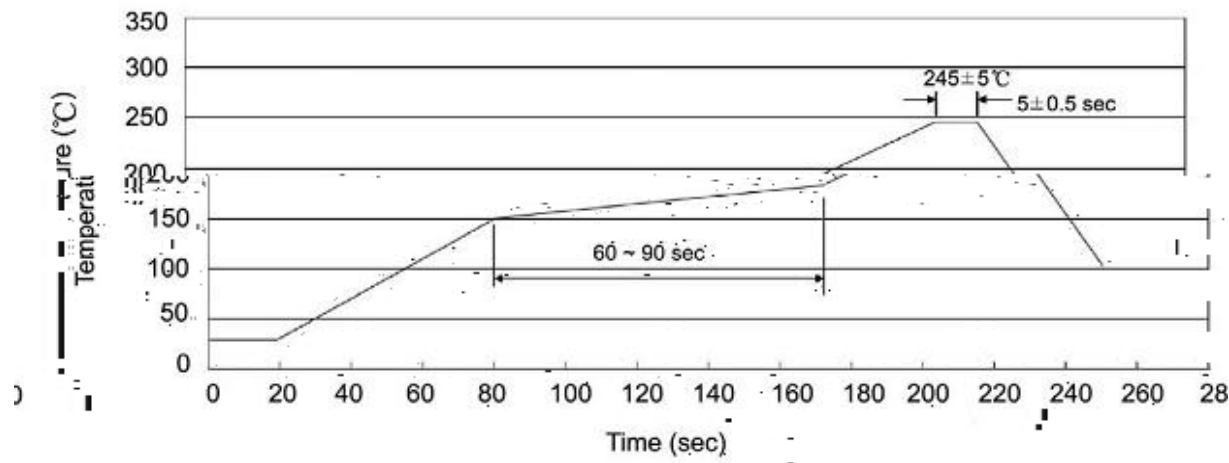

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		

/ Notices