


:



	()			

Fig.1 Forward Current Derating Curve

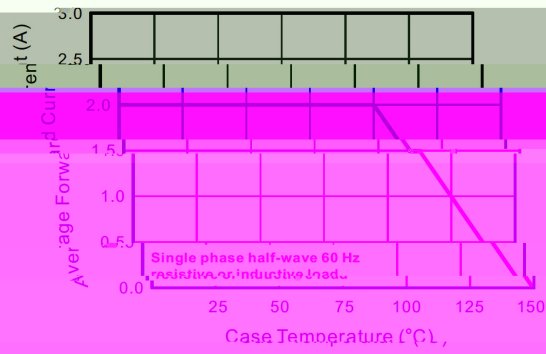


Fig.2 Typical Reverse Characteristics

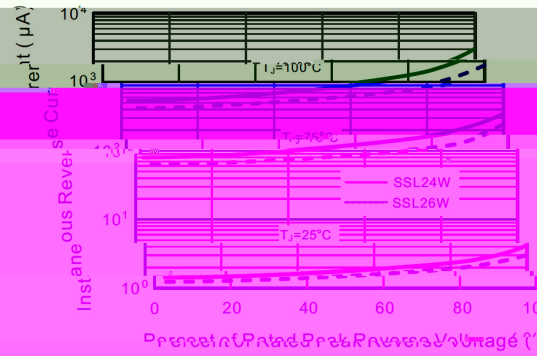


Fig.3 Typical Forward Characteristic



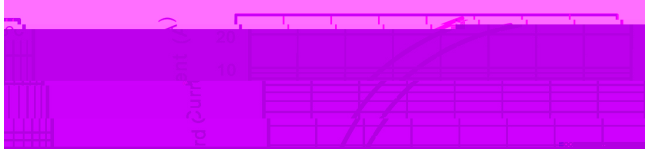



Fig.4 Typical Junction Capacitance

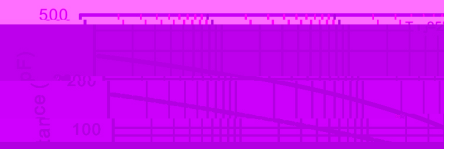

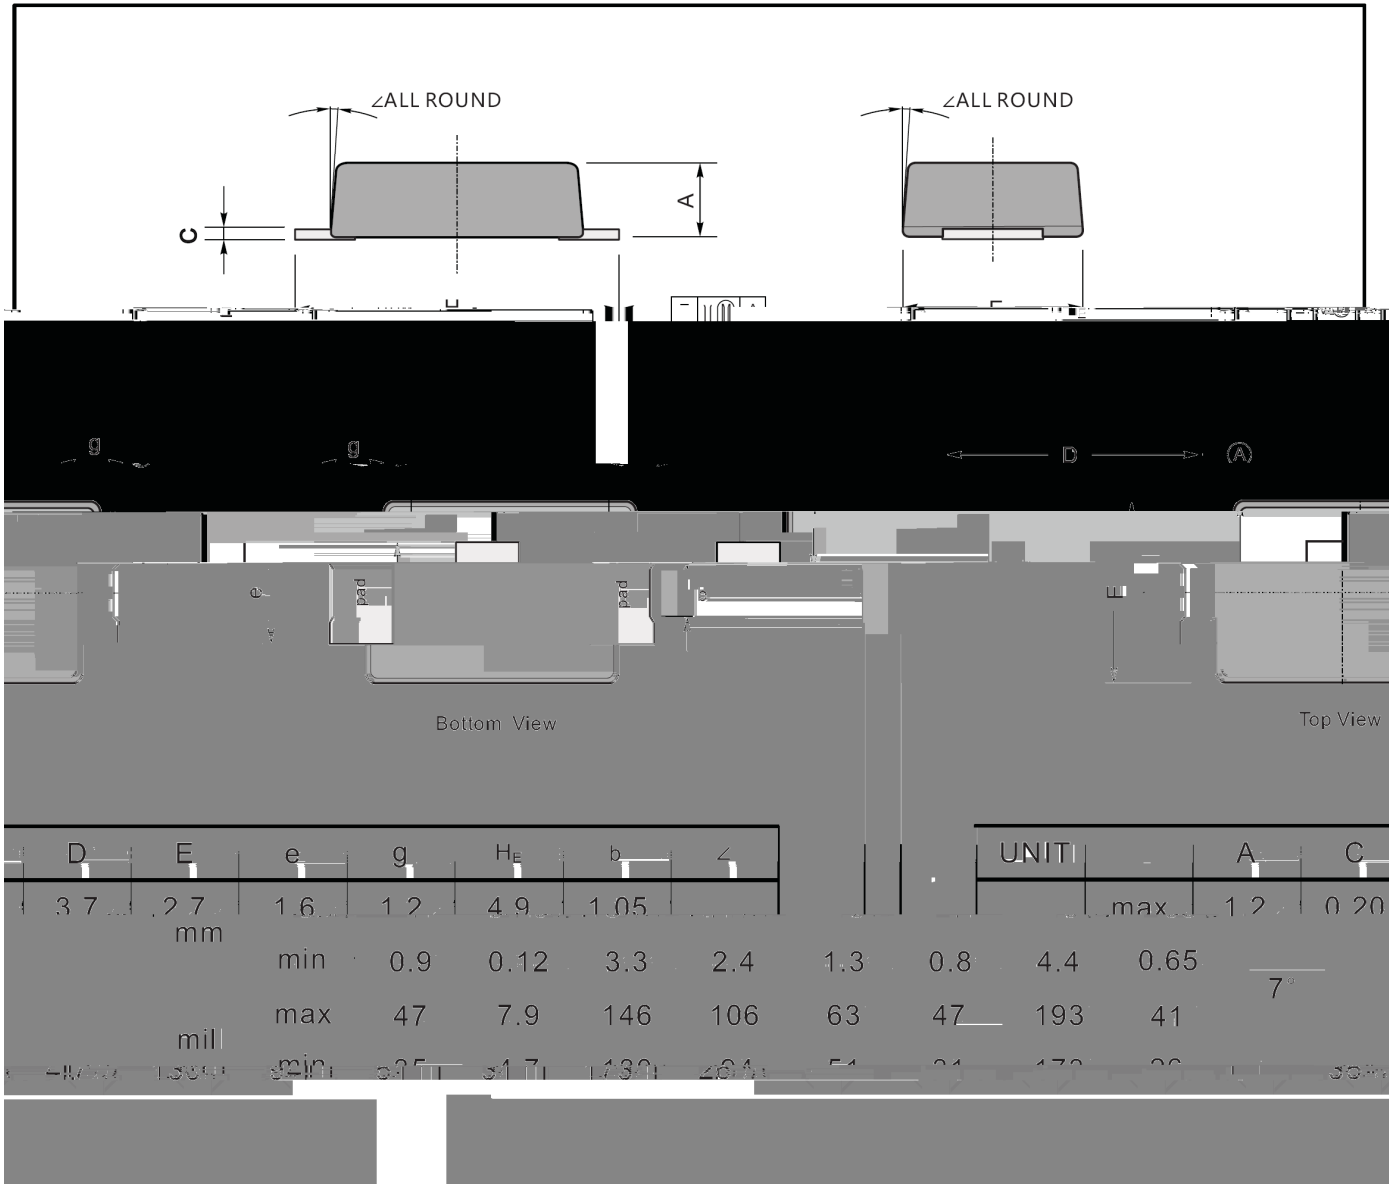

Marking

Type number	Marking code
SSL24F	SSL24
SSL26F	SSL26

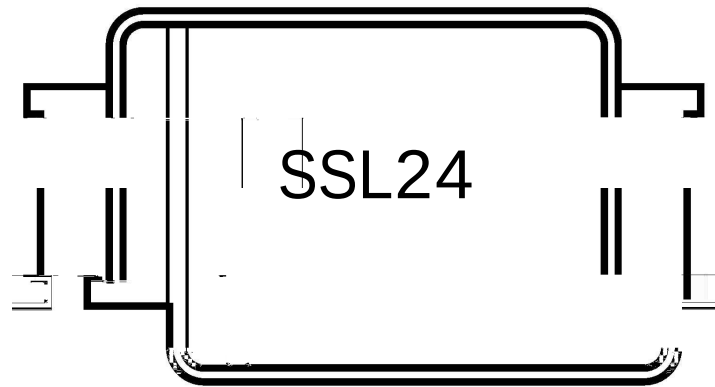

SSL24

1 *


3 *

SSL24

*

*

Temperature Profile for IR Reflow Soldering(Pb-Free)

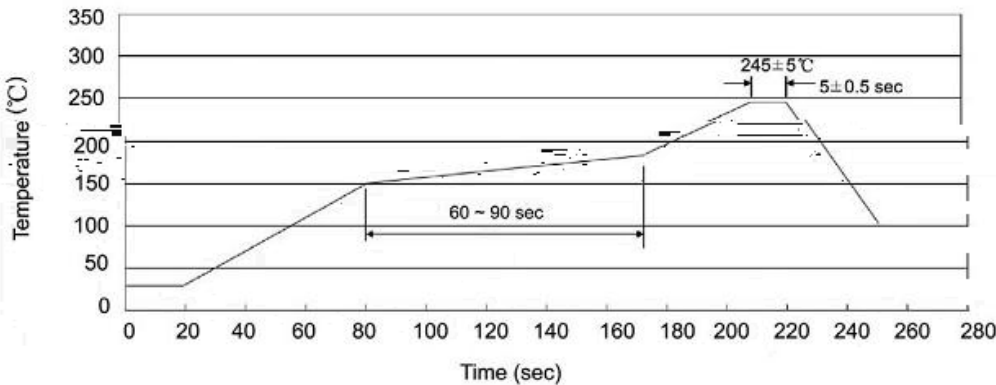

± ± ± ±

± ± ± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		