


!"



" " (" " # * - 0 / , 9 : , 1 7 - "

40V

3.0A

:

:

" " (" " ; * 5 : < / * - "

"

" " (" " \$ 9 9 = , 0 5 : , 1 7 - " "

.

" " (" " ' > < , + 5 - * 7 : " ? , / 0 < , : "




" " (" " @ , 7 7 , 7 8 "

1



2

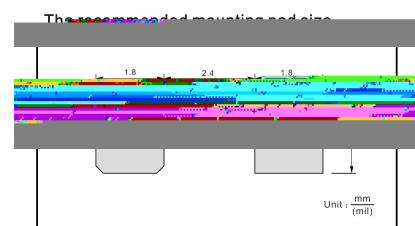

" " (" " 4 5 / 6 , 7 8 "

!"



#\$%\$" & ' '%

" " (" " \$B-1<:*"45C,D<D") 5:,78-E%5FAG H"

"

参数	符号	数值	单位
	()		
			℃
			℃
			℃

)

)

" " (" " '=*0:/,05-" ? I 5/50:* /,-:,0-E%5FAG H"

"


参数	符号	测试条件	数值	单位
		℃		
		℃		



" (" " ' =*0:/,05=" ? 15/50:* /,-:,0" ? </+*"

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

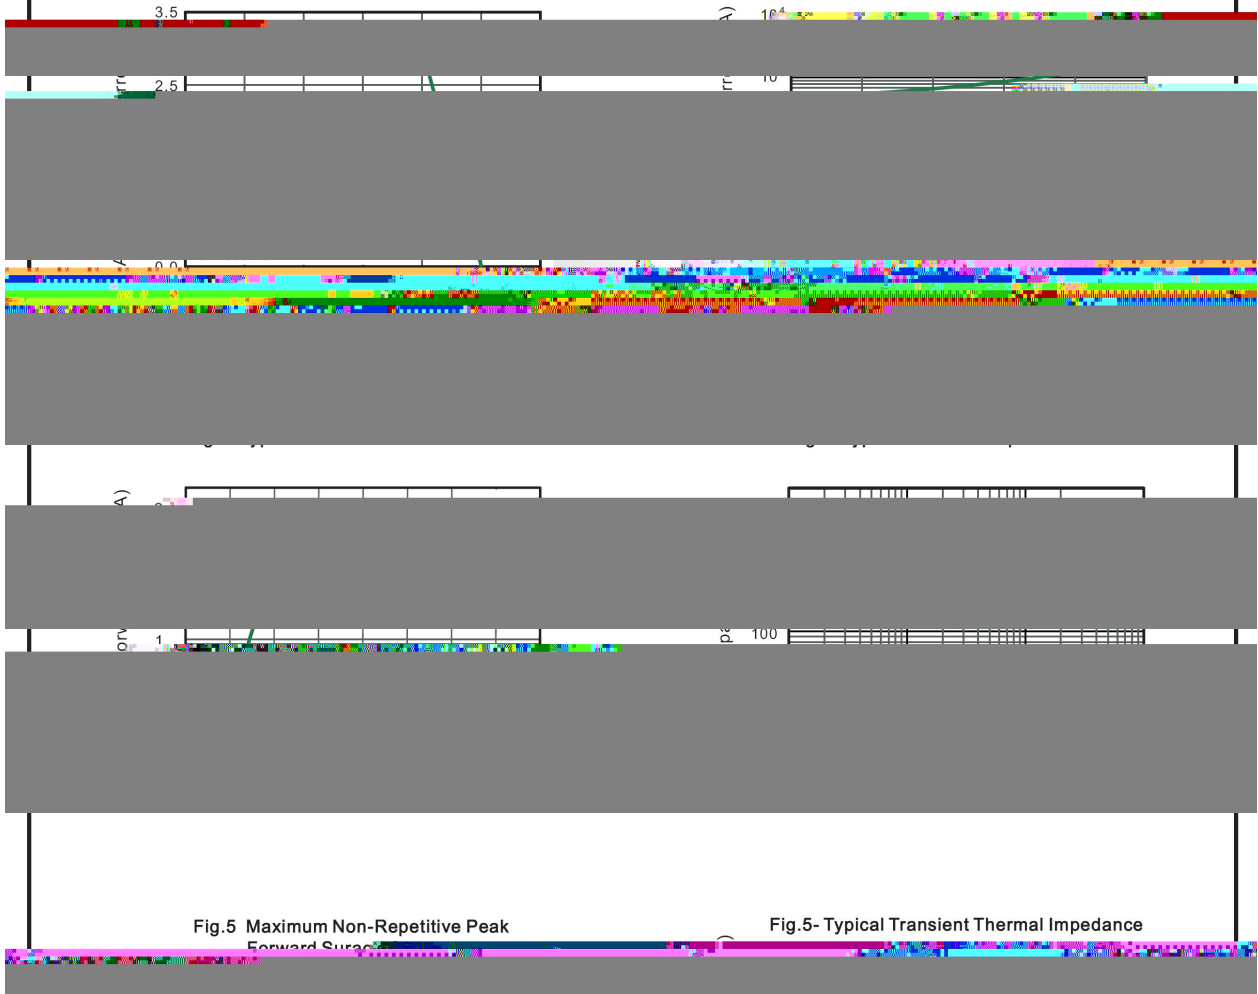

!"




#\$%\$" & ' '%

" " (" " @50658*"#,D*7-,17 -"

"

SMA

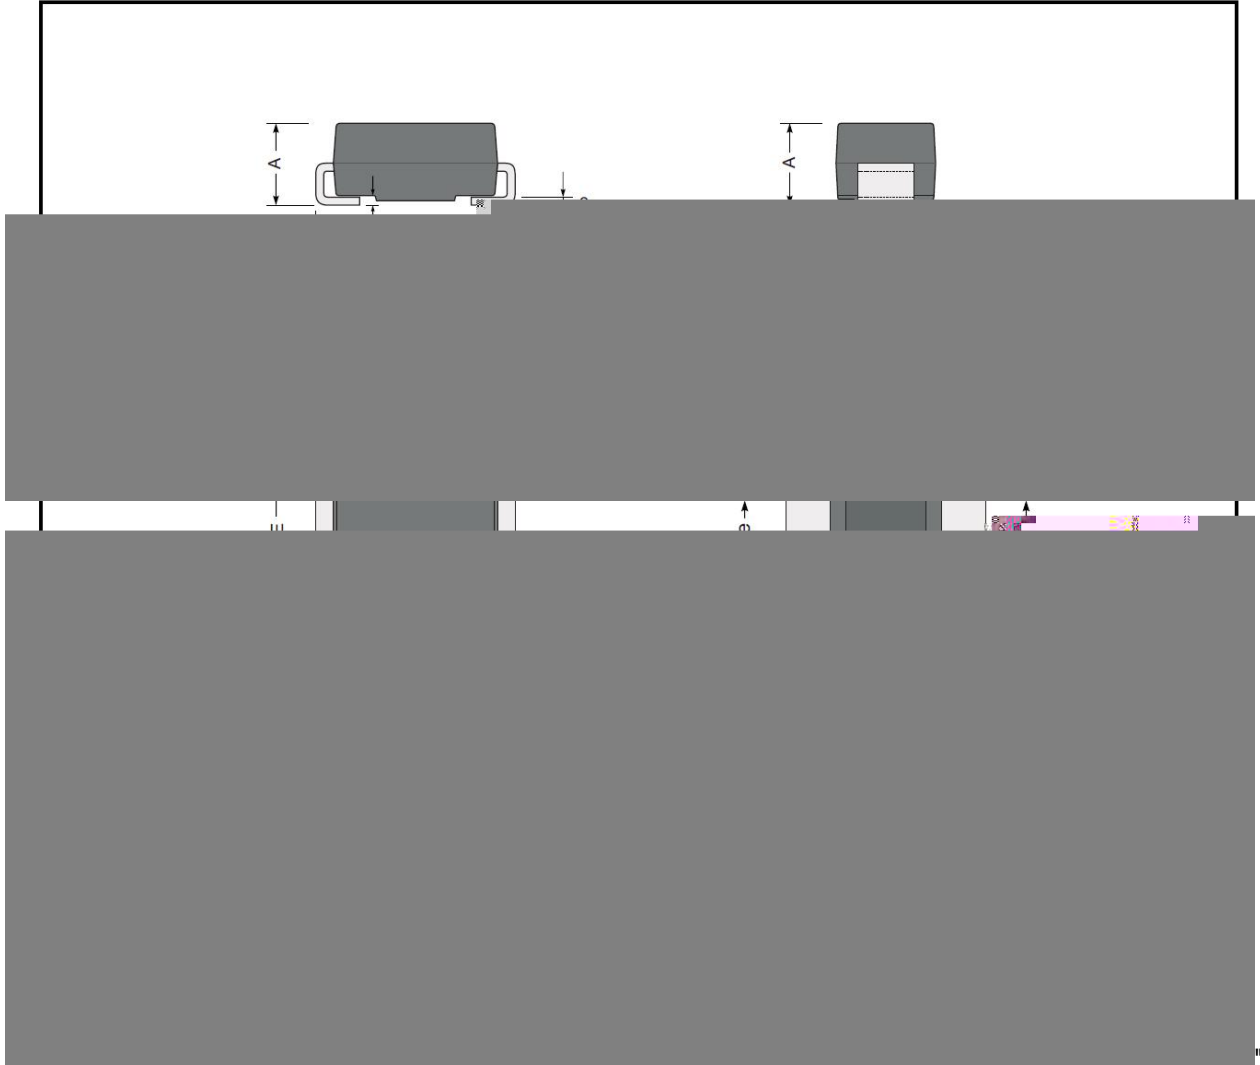



!"



#\$%\$" & ' '%

" " (" " 45/6,78"j7-:/<0:,17 - "

SSL34	SSI 34

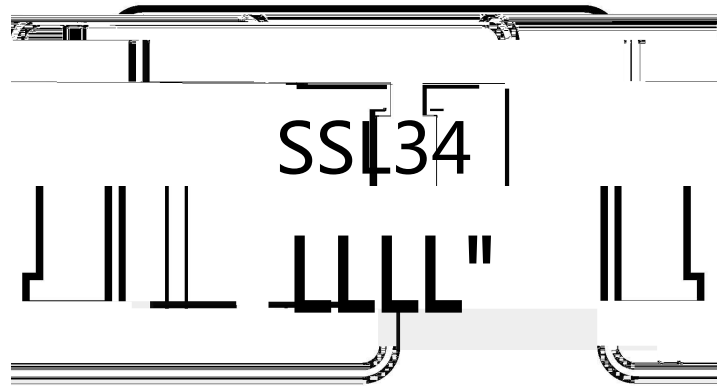


*

!"



#\$\$" & ' '%

E H" " (" " Temperature Profile for IR Reflow Soldering(Pb-Free)

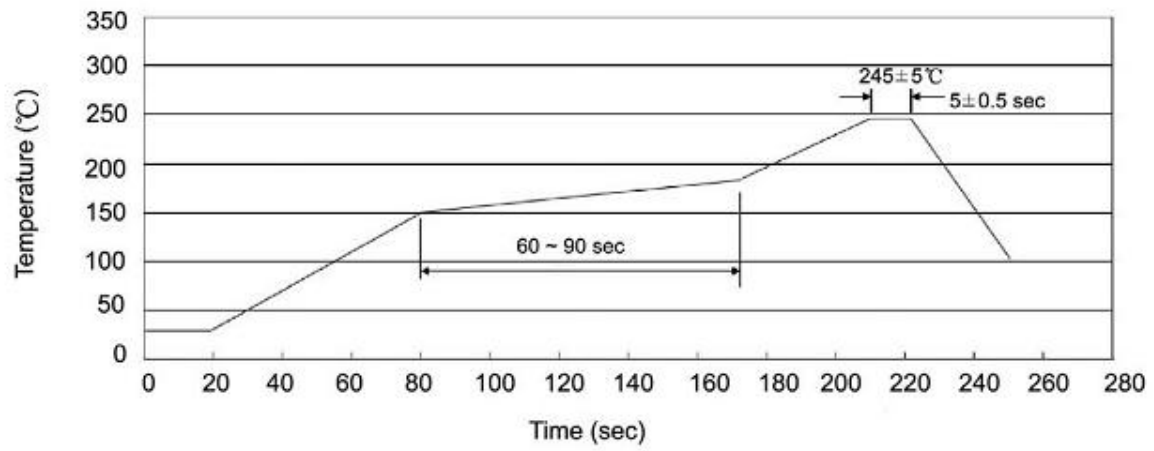

±

±

±

±

" " (" ") * -, -:570*":1" 1-. */ ,78"&*5:"%* -:"?17 ., :,17 -"

± 2 ±