

/ Descriptions

3.0A DBF
3.0A Single-Phase Glass Passivated Bridge Rectifiers, DBF thin package.


/ Features

50V~1000V 3.0A
Reverse Voltage :50 to 1000V,Forward Current: 3.0A, Designed for Surface Mount Application,HF product.


/ Applications

General purpose.


/ Equivalent Circuit



/ Pinning

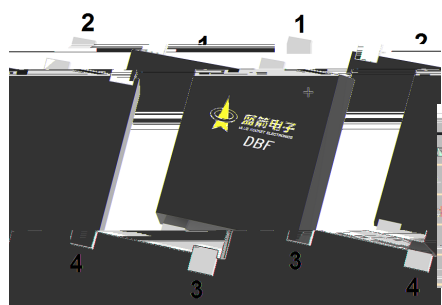

The recommended mounting pad size

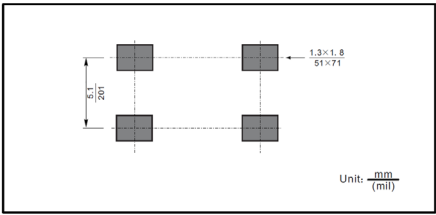

/ Marking

See Marking Instructions.

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating							Unit
		TMBF 3005G	TMBF 301G	TMBF 302G	TMBF 304G	TMBF 306G	TMBF 308G	TMBF 310G	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_A=40$	$I_{F(AV)}$	3.0							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80							A
Rating for fusing ($t<8.3ms$)	I^2t	26.56							A ² s
Typical Thermal Resistance ^(Note1)	R_{JA}	55							°C/W
	R_{JC}	8							°C/W
Typical Junction Capacitance ^(Note2)	C_i	35							pF
Operating and Storage Temperature Range	T_j, T_{stg}	-55~+150							°C

Note:

1. Thermal resistance from Junction to Ambient on P.C.board mounting.
2. Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Rating	Unit
Maximum Forward Voltage	V_F	$I_F=1.5A$	1.05	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25^{\circ}C$	5	μA
		$T_a=125^{\circ}C$	500	

/ Electrical Characteristic Curve

Fig. 1 Derating Curve for Output Rectified Current

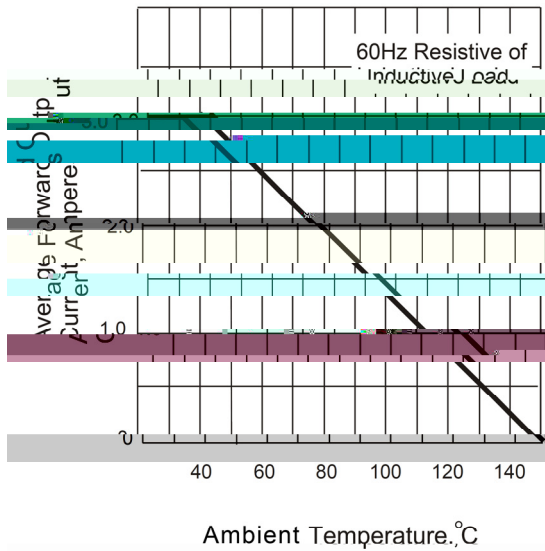


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

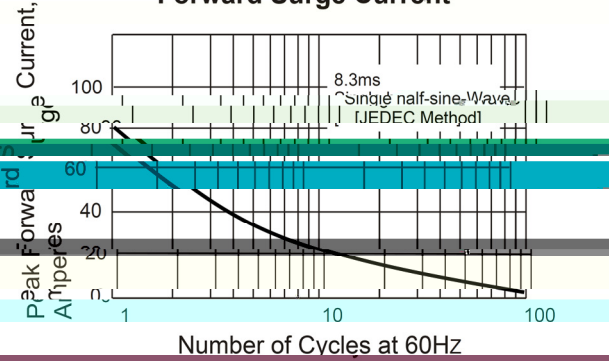


Fig. 4 Typical Reverse Characteristics

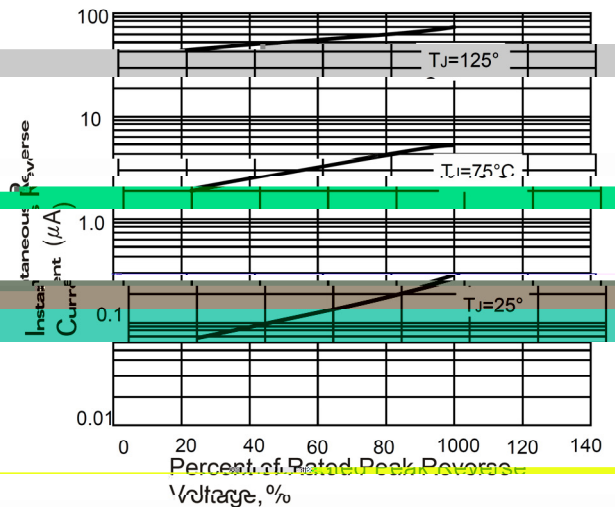


Fig. 3 Typical Instantaneous Forward Characteristics


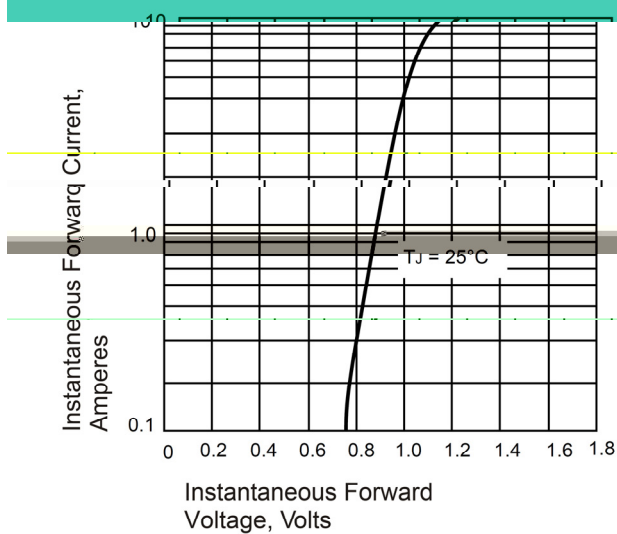


Fig. 5 Typical Junction Capacitance





/ Marking Instructions

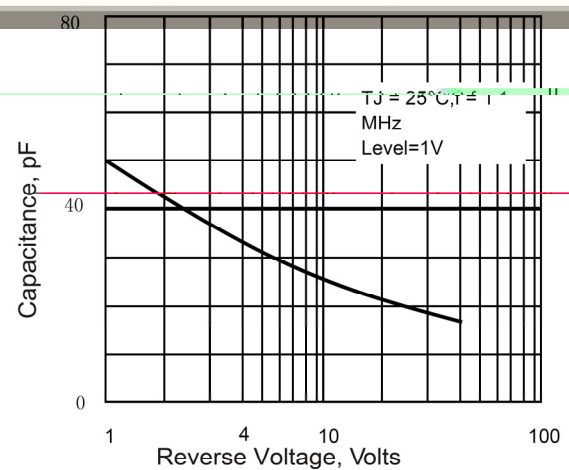

TMBF3005G

Note:

TMBF3005G

Product Type

Lot No. Code, code change with Lot No

() /

180

Note:

1 150 180